




Qspeed™ Q 系列二極體

- 低 Q_{RR} 、低 I_{RRM} 、低 t_{RR}
- 高 dI_p/dt 能力 ($1000\text{ A}/\mu\text{s}$)
- 緩恢復可降低 EMI
- 無需突波吸收器電路
- 減小 EMI 濾波器元件的尺寸，並降低其數量
- 實現極速切換

600 V、最低 Q_{RR} 、高效能矽二極體

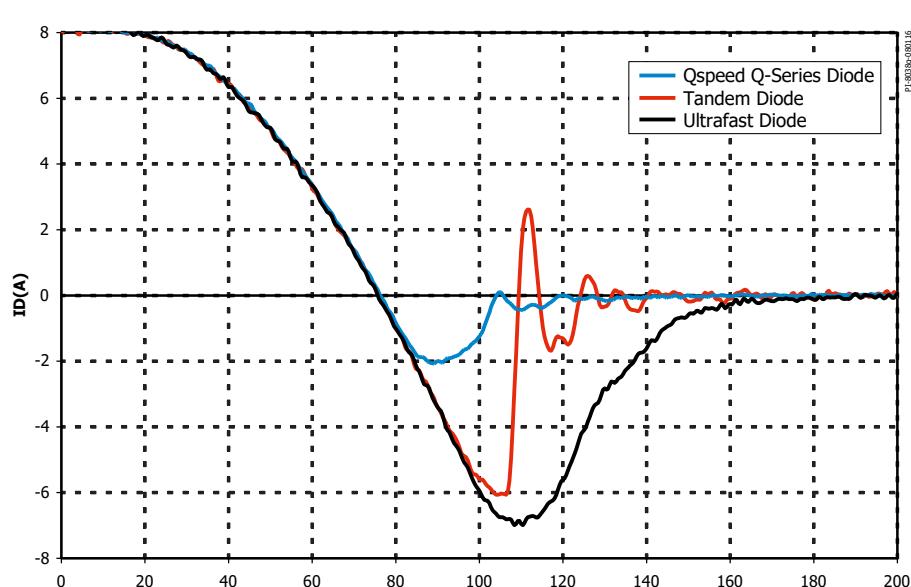

應用

- PFC 升壓式二極體
- 音訊放大器
- 馬達驅動電路
- UPS
- DC-AC 逆變器

輸出功率

600 V Q 系列				
零件編號	I _{F(AVG)}	V _F	Q _{RR}	封裝
LQA03TC600	3 A	2.3 V	5 nC	TO-220AC*
LQA05TC600	5 A	2.28 V	6 nC	TO-220AC*
LQA08TC600	8 A	2.3 V	7 nC	TO-220AC*

300 V Q 系列				
零件編號	I _{F(AVG)}	V _F	Q _{RR}	封裝
LQA06T300	6 A	1.34 V	9 nC	TO-220AC
LQA10T300	10 A	1.36 V	10 nC	TO-220AC
LQA16T300	16 A	1.4 V	12 nC	TO-220AC
LQA30T300	30 A	1.45 V	13 nC	TO-220AC
LQA12T300C	6 A	1.34 V	8.5 nC	TO-220AB
LQA20T300C	10 A	1.36 V	10 nC	TO-220AB
LQA20B300C	10 A	1.36 V	10 nC	TO-263AB
LQA30A300C	15 A	1.4 V	12 nC	TO-247AD
LQA32T300C	16 A	1.4 V	12 nC	TO-220AB
LQA60A300C	30 A	1.45 V	13 nC	TO-247AD

附註：I_{F(AVG)}; T_J = 150 °C; V_F; T_J = 150 °C; Q_{RR}; T_J = 25 °C; 600 V TO-220AC = 隔離式

200 V Q 系列				
零件編號	I _{F(AVG)}	V _F	Q _{RR}	封裝
LQA10T200C	5 A	0.8 V	15.6 nC	TO-220AB
LQA10N200C	5 A	0.8 V	15.6 nC	TO-252
LQA20T200C	10 A	0.85 V	20 nC	TO-220AB
LQA20N200C	10 A	0.85 V	20 nC	TO-252
LQA30T200C	15 A	0.86 V	21.5 nC	TO-220AB
LQA30B200C	15 A	0.86 V	21.5 nC	TO-263AB
LQA40T200C	20 A	0.875 V	22 nC	TO-220AB
LQA40B200C	20 A	0.875 V	22 nC	TO-263AB



Packages: TO-220AC, D2PAK,
DPAK, TO-247AD, TO-220AB

設計支援

應用說明

Qspeed 高溫反向偏壓 (HTRB) 可靠性測試 (AN-300) (www.power.com/an-300)